

*SIMPLICITY ALSO IN
NO-TILL CONDITIONS*

SNT-25

No-Till Belt Cone Seeder

 HALDRUP USA



SIMPLICITY ALSO IN NO-TILL CONDITIONS

HALDRUP SNT-25 NO-TILL BELT CONE SEEDER

DESIGNED TO WORK UNDER NO-TILL SOIL CONDITIONS
THANKS TO THE ROBUST FRAME THAT CAN BE
EQUIPPED WITH DIFFERENT COULTER OPTIONS.

MAINLY DEVELOPED FOR SOYBEANS, THIS MACHINE CAN
ALSO BE USED TO SEED COVER CROPS, GRASSES AND
MUCH MORE IN A VERY SIMPLE AND PRECISE WAY.

SIMPLICITY AND ROBUSTNESS!



DIMENSIONS

9

ELECTRIC BOX

1

OPERATOR PLATFORM

3

FRAME

2

COULTER

7

4

OPERATOR TERMINAL

5

SEED DISTRIBUTOR

6

GEARBOX





8

GROUND WHEEL



THE HEART OF THE MACHINE

HALDRUP ELECTRIC BOX

-  REINFORCED SHEET METAL CABINET.
-  WATERPROOF.
-  12 AND 24 VOLTS / FUSES.
-  *GPS INPUT.

**Optional*



 HALDRUP USA

SUPER STRONG

HALDRUP FRAME



STRONG AND COMPACT!

HALDRUP FRAME

 FRAME WIDTH: 7.8 / 8.2 FT. (2.40 / 2.50 M).

 COMPACT FRAME.

 3-POINT HITCH / PULL TYPE.


 WHEELS: 6.5/80 – 15.

 MAIN PARTS ARE SCREWED IN ORDER TO FACILITATE MODIFICATIONS.



COMFORT WITH MANY OPTIONALS

HALDRUP OPERATOR PLATFORM

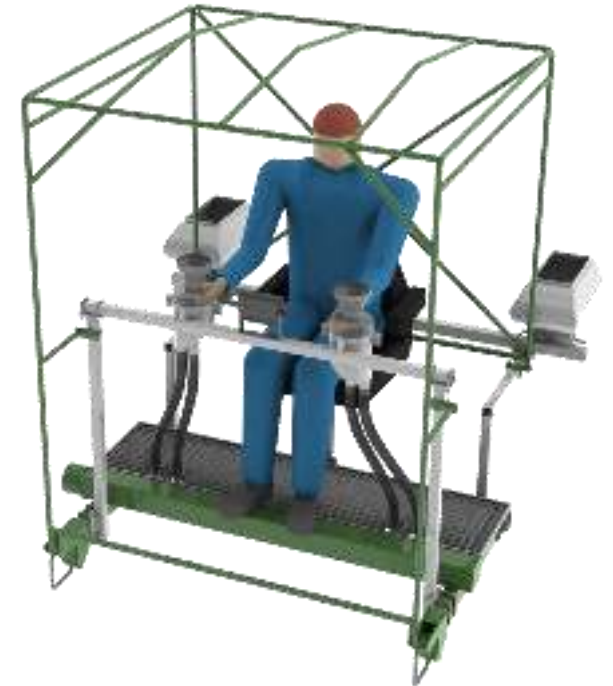

COMFORT DURING LONG WORKING HOURS

HALDRUP OPERATOR PLATFORM

- DIFFERENT WIDTHS: 6.5 / 8.2 FT. (2.00 / 2.5 M).
- SEATING OPTIONS: COMFORT, STANDARD.
- *PROTECTION AGAINST WIND & RAIN.
- *WASTE BAG / SEED BOX HOLDER.
- *SEAT WITH INTEGRATED HEATING.

**Optional*



SIMPLE AND FAST CONTROL

HALDRUP OPERATOR TERMINAL



TOUCHSCREEN / FULL COLOUR.



CYCLE CONTROL SETTINGS.



AUTOMATIC / MANUAL OPERATION MODES.



DIFFERENT LANGUAGES AVAILABLE.



WHERE EVERYTHING BEGINS





HALDRUP DISTRIBUTOR



HIGH PRECISION IN THE EFFICIENT WAY

HALDRUP DISTRIBUTOR



-  ANTI-STATIC MATERIAL.
-  FILLING FUNNEL: 0.62 / 1.02 / 1.49 / 1.96 / 2.83 IN. (16 / 26 / 38 / 50 / 72 MM).
-  *MANUAL / AUTOMATIC SLOPE EQUALIZER.
-  BELT CONE: 7.48 / 11.41 IN. (190 / 290 MM).






*Optional

*Optional



HIGH PRECISION IN THE EFFICIENT WAY

HALDRUP DISTRIBUTOR

-  DISTRIBUTION HEAD: 4 / 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 18 / 20 / 24 OUTLETS.
-  STAINLESS STEEL SEED TUBE.
-  *QUICK CLAMPING FOR DISTRIBUTOR.
-  *"Y" TO CONNECT PIPES.
-  *AIR FLOW CLEANING

**Optional*








 HALDRUP USA

FOR ALL CONDITIONS, ALL OPTIONS



BEST SEEDING PERFORMANCE

COULTERS

-  ACRA PLANT, FRONTIER, LEMKEN.
-  SPECIFIC BAR FOR EACH COULTER BRAND.
-  SINGLE OR DOUBLE DISCS.
-  SHORT AND LONG VERSIONS.
-  *ADDITIONAL SPRING, DEPTH GUIDE, ETC.



HALDRUP USA






MAXIMUM WORK FLEXIBILITY

HALDRUP GEARBOX




THE DISTANCE YOU REQUIRE

HALDRUP GEARBOX

-  PLOT LENGTH ADJUSTMENT: 4.9 TO 82 FT. (1.5 TO 25 M).
-  STEPLESS ADJUSTMENT.
-  CAM GEAR
-  DISPLAY WITH ADJUSTMENT SCREW.
-  *ELECTRIC SEED DRIVE.

**Optional*

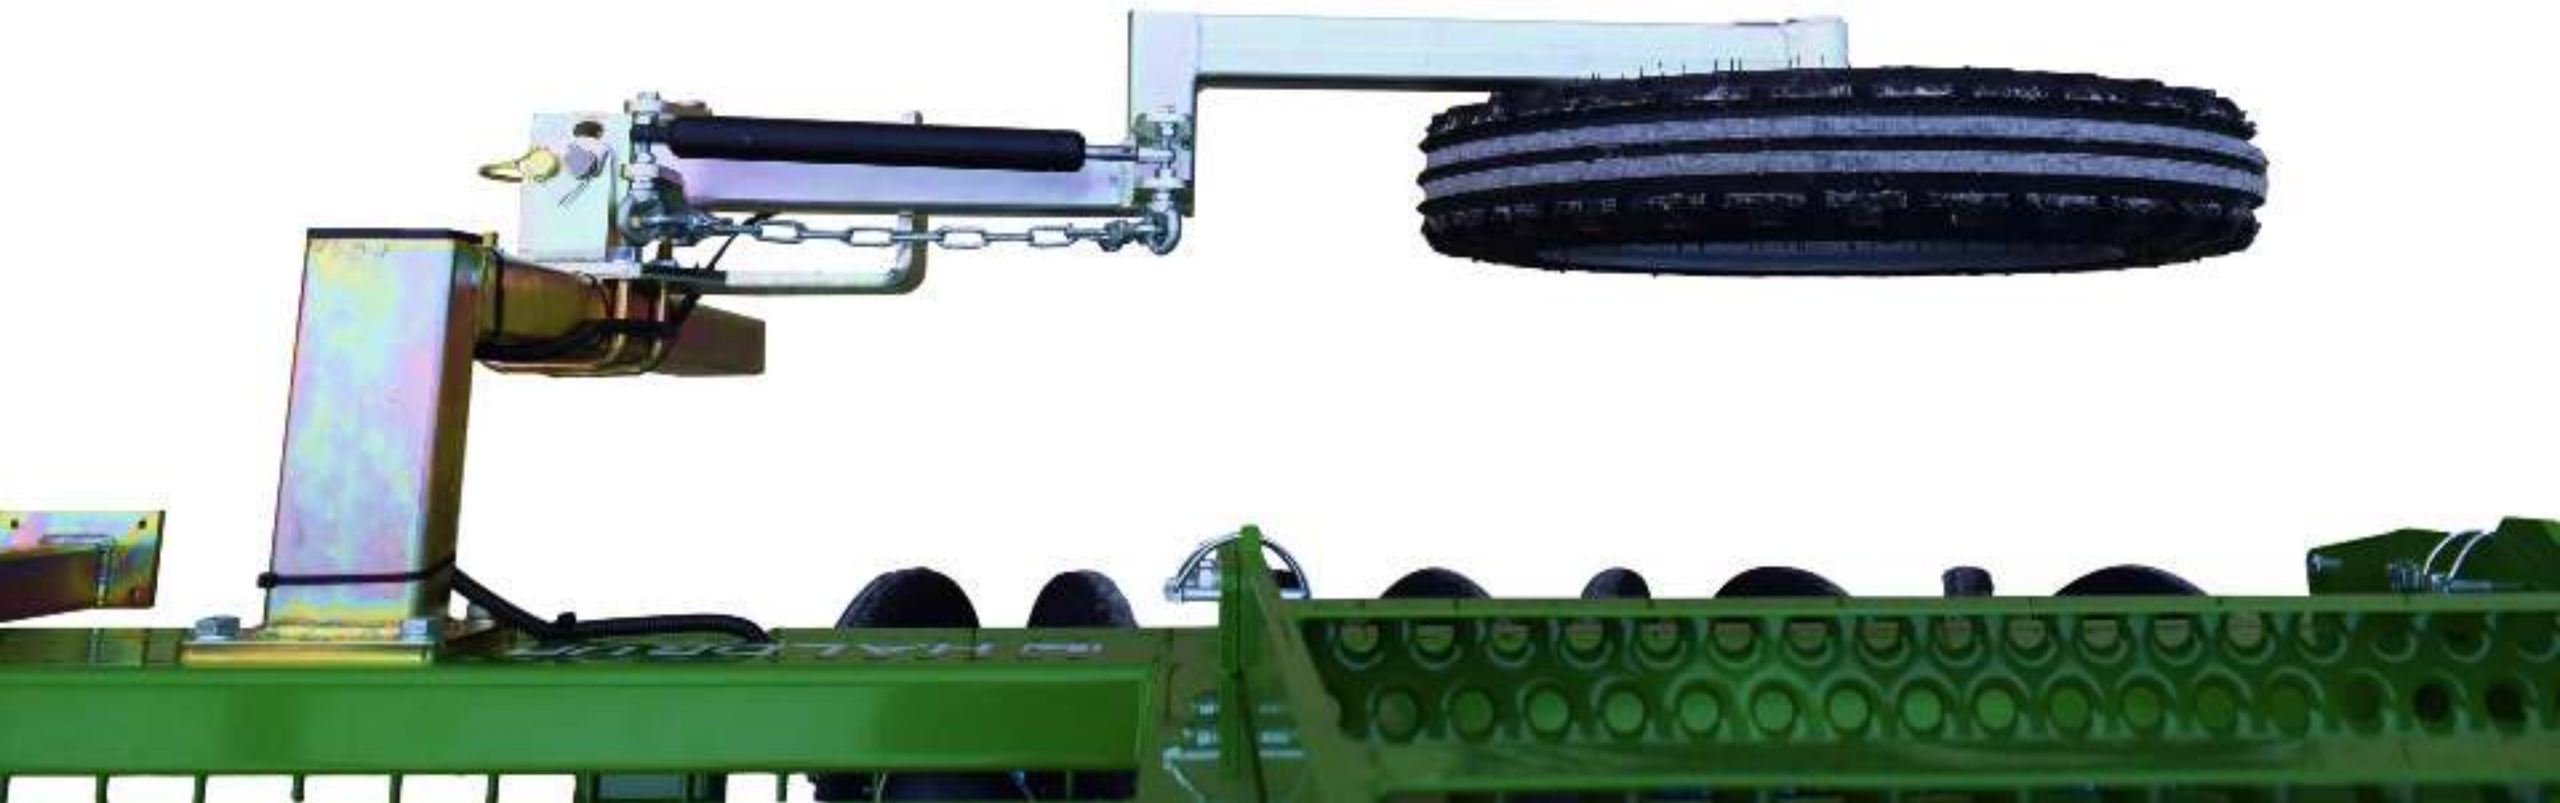

TRIGGERING THE POINT EXACTLY

HALDRUP MEASURING SYSTEM



SAME PLOT, SAME ALLEY

HALDRUP GROUD WHEEL



SENSOR INTEGRATED WITH A SEED CONTROL UNIT.



WORKING & TRANSPORT POSITION.



HIGH PRECISION.



CALIBRATION INTEGRATED.

OFFERING A MULTIPLE OPTIONS

TRIGGER OPTIONS

MANUAL TRIGGER




CABLE SYSTEM



GPS TRIMBLE
CONNECTOR



GPS PULSE
GENERATOR

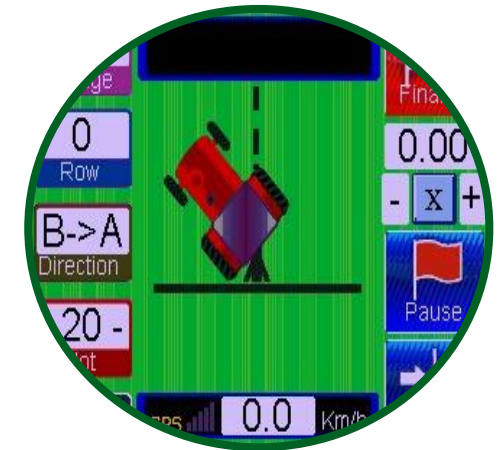

 HALDRUP USA

SUPER COMPACT

HALDRUP SNT-25 DIMENSIONS

TOTAL WIDTH: From 5.90 ft. / 1.80 m

TOTAL LENGTH: From 6.2 ft / 1.90 m.



TRANSPORT HEIGHT: From 5.9 ft. / 1.80 m

TRANSPORT WEIGHT: From 1000 lbs. / 450 Kg

OPERATION REQUIRES OPTIONALS

HALDRUP OPTIONALS

FERTILIZER



ROW MARKER



SEEDER MANAGER



MICROGRANULATE



ROOF



 HALDRUP USA



HALDRUP USA CORP.

425 INDUSTRIAL PARKWAY
OSSIAN, IN 46777
USA

+1 (844) 694 – 6205

Info.usa@haldrup.net

www.haldrup.net