

*HIGH PRECISION IN A
COMPACT FRAME*

SP-30

Precision Seeder

 HALDRUP USA



HIGH PRECISION IN A COMPACT FRAME

HALDRUP SP-30 PRECISION SEEDER

A ROBUST AND COMPACT PRECISION SEEDER DESIGNED TO WORK QUICKLY AND EFFICIENTLY WITH THE HIGHEST PRECISION IN DIFFERENT SOIL CONDITIONS.

COMPACT, LIGHTWEIGHT AND VERY EASY TO OPERATE FOR THE USER, THIS MACHINE CAN BE EQUIPPED WITH NUMEROUS OPTIONS AVAILABLE TO SUIT YOUR WORKING CONDITIONS.

FROM ONE LOCATION TO ANOTHER, EASILY!

5 OPERATOR TERMINAL

SEED DISTRIBUTOR 6

1 ELECTRIC BOX

OPERATOR PLATFORM 4

2 TURBINE

9 GEARBOX

SEED EXCHANGE 7

3 FRAME





GROUND WHEEL 10

8 COULTER



THE HEART OF THE MACHINE





HALDRUP ELECTRIC BOX

-  REINFORCED SHEET METAL CABINET.
-  WATERPROOF.
-  12 AND 24 VOLTS. / FUSES.
-  *GPS INPUT.

**Optional*

AIR VACUUM FOR PRECISE PLANTING

HALDRUP TURBINE

-  MECHANICAL TRANSMISSION (PTO).
-  VACUUM REGULATOR.
-  AIR COMPRESSOR INTEGRATED.
-  AIR TANK.







SUPER STRONG

HALDRUP FRAME



STRONG AND COMPACT!


HALDRUP FRAME

-  DIFFERENT WORKING WIDTHS: 6.5 / 8.2 / 9 FT.
(2.00 / 2.5 / 2.75 M).
-  DOUBLE FRAME.
-  3-POINT HITCH OR DRAW BAR.
-  WHEELS: 6.5/80 – 15.





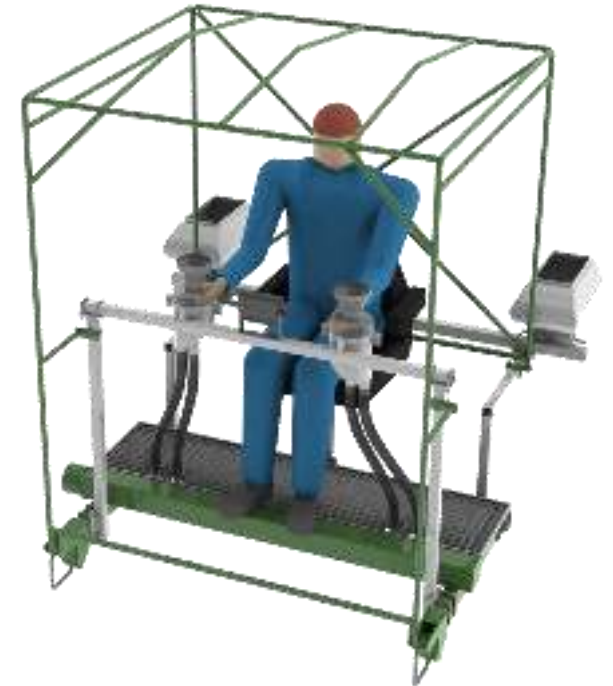


COMFORT WITH MANY OPTIONALS

HALDRUP OPERATOR PLATFORM



COMFORT DURING LONG WORKING HOURS

HALDRUP OPERATOR PLATFORM

-  DIFFERENT WIDTHS: 6.5 / 8.2 FT. (2.00 / 2.5 M).
-  SEATING OPTIONS: COMFORT, STANDARD.
-  *PROTECTION AGAINST WIND & RAIN.
-  *WASTE BAG / SEED BOX HOLDER.
-  *SEAT WITH INTEGRATED HEATING.

**Optional*



SIMPLE AND FAST CONTROL

HALDRUP OPERATOR TERMINAL



TOUCHSCREEN / FULL COLOUR.



CYCLE CONTROL SETTINGS.



AUTOMATIC / MANUAL OPERATION MODES.



DIFFERENT LANGUAGES AVAILABLE.



WHERE EVERYTHING BEGINS





HALDRUP DISTRIBUTOR



HIGH PRECISION IN THE EFFICIENT WAY

HALDRUP DISTRIBUTOR



-  ANTI-STATIC MATERIAL.
-  FILLING FUNNEL: 0.62 / 1.02 / 1.96 / 2.83 IN. (16 / 26 / 50 / 72 MM).
-  *MANUAL / AUTOMATIC SLOPE EQUALIZER.
-  DISTRIBUTION HEAD: 4 / 5 / 6 / 7 / 8 / 10 / 12 OUTLETS.

**Optional*



 HALDRUP USA






DELIVER BEST RESULTS

HALDRUP SEED EXCHANGE



HIGH PRECISION IN THE EFFICIENT WAY

HALDRUP DISTRIBUTOR

-  FLAPS: PNEUMATIC DRIVE.
-  SEED FEEDING / EMPTYING TIME CONTROL.
-  VACUUM SUCTION CONTROL.
-  SEEDING DISCS WITH SPECIFIC DESIGN.
-  ADJUSTABLE SEED SINGULATOR.





 HALDRUP USA

FOR ALL CONDITIONS, ALL OPTIONS

NC TECH



BEST SEEDING PERFORMANCE

MONOSEM COULTERS

NG + TECH



MONOSEM OPTIONS: NC, NG+ AND NX.

DOUBLE DISCS SYSTEM.

HEAVY-DUTY PARALLEL LINKAGE WITH TWO DEPTH CONTROL SPRINGS.

WORKING DEPTH ADJUSTMENT WITH A LEVER.

NX TECH



OFFERING A MULTIPLE OPTIONS

MONOSEM COULTER OPTIONS

CUTTING DISC
FOR NO-TILL.



CLOD REMOVER
AND OTHERS



SEED BOX FOR
CONTINUOUS SEEDING



HYDRAULIC
LIFTING





 HALDRUP USA

MAXIMUM WORK FLEXIBILITY

HALDRUP GEARBOX



THE DISTANCE YOU REQUIRE

HALDRUP GEARBOX



UP TO 8 ROWS.



STEPLESS ADJUSTMENT.



CAM GEAR.



DISPLAY WITH ADJUSTMENT SCREW.

CHOOSE YOUR SEED POPULATION


HALDRUP VARIABLE RATE*

THE VARIABLE SEED RATE CONTROL SYSTEM ALLOWS SIMPLE ADJUSTMENT FOR THE OPERATOR TO ACHIEVE THE EXACT POPULATION ON EACH PLOT.

AUTOMATICALLY CONTROLLED BY THE MACHINE SOFTWARE, THE SYSTEM ALLOWS QUICK AND EASY ADJUSTMENTS.

CHANGE TO VARIABLE WITH HALDRUP.

**Optional*

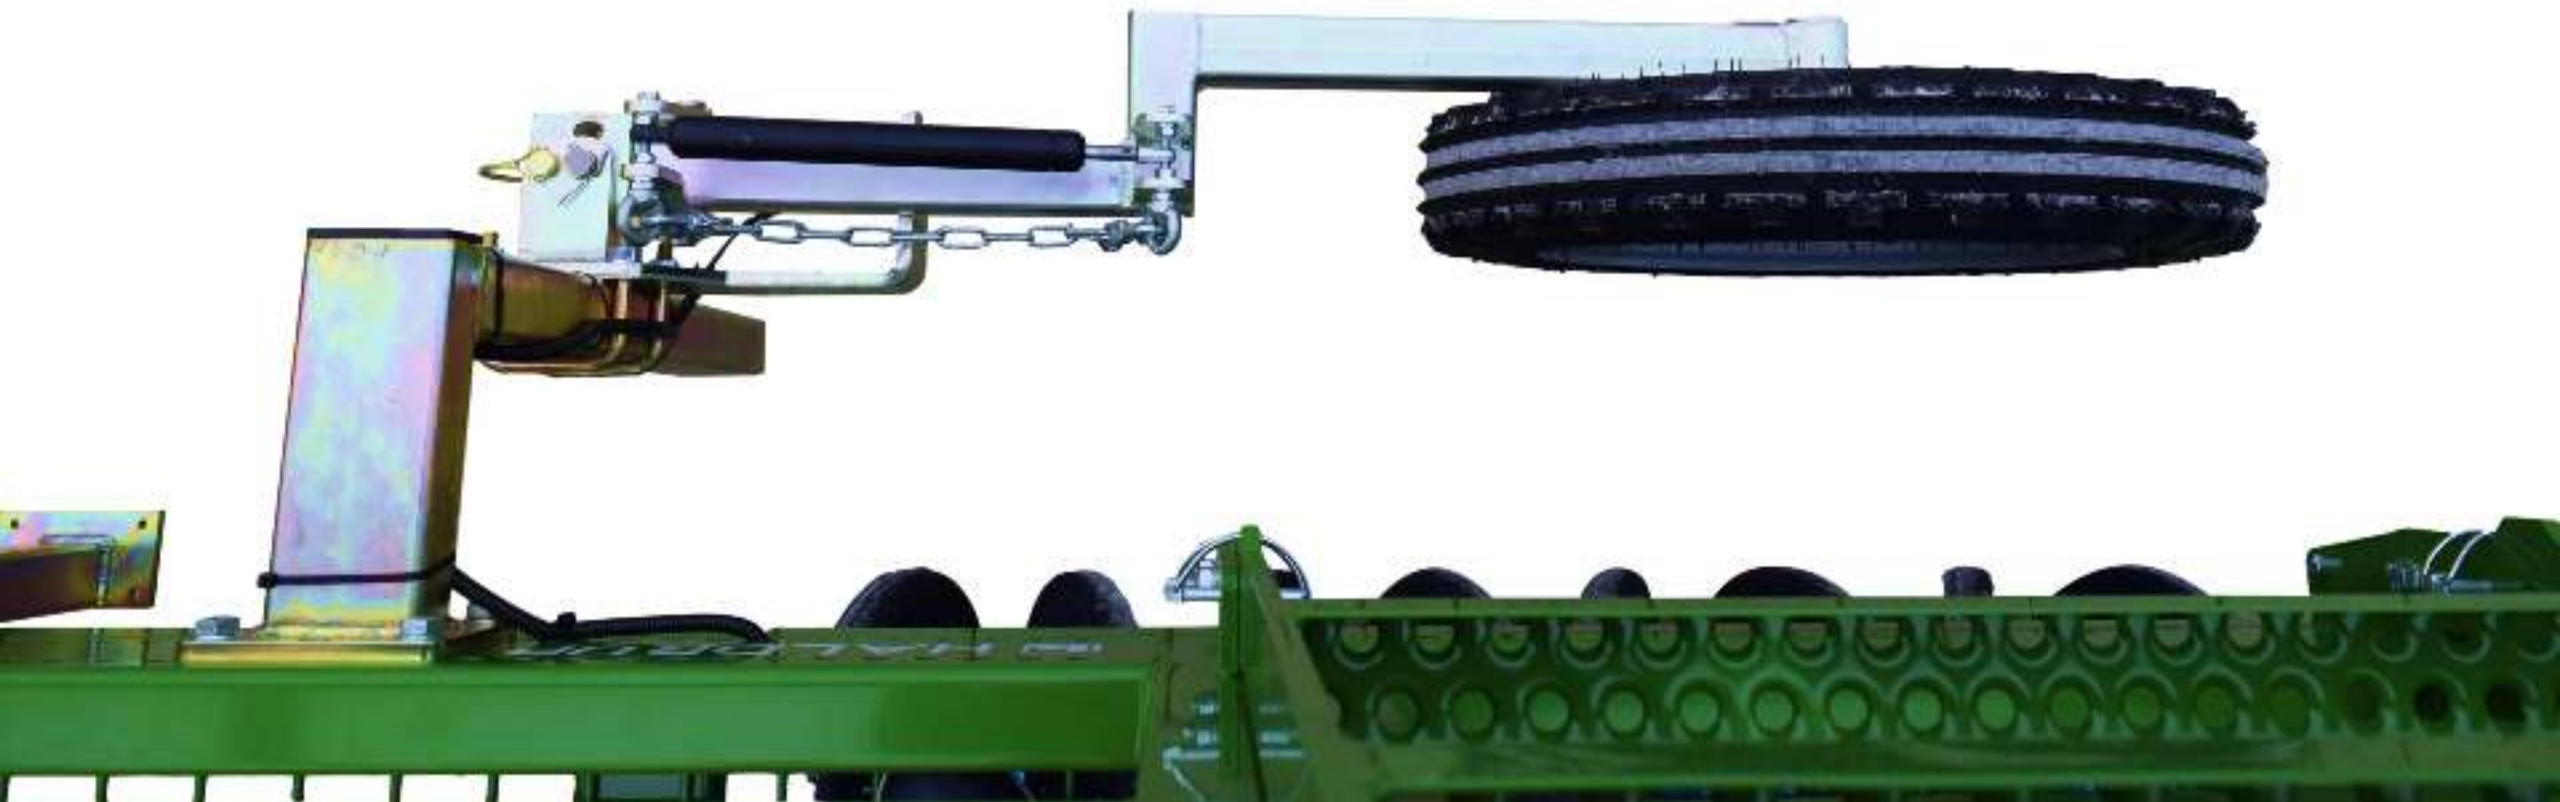

TRIGGERING THE POINT EXACTLY

HALDRUP MEASURING SYSTEM

SAME PLOT, SAME ALLEY

HALDRUP GROUD WHEEL



SENSOR INTEGRATED WITH A SEED CONTROL UNIT.



WORKING & TRANSPORT POSITION.



HIGH PRECISION.



CALIBRATION INTEGRATED.



OFFERING A MULTIPLE OPTIONS

TRIGGER OPTIONS

MANUAL TRIGGER




CABLE SYSTEM



GPS TRIMBLE
CONNECTOR



GPS PULSE
GENERATOR

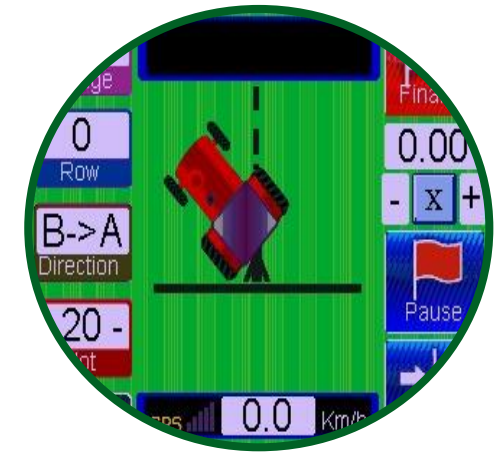

 HALDRUP USA

SUPER COMPACT

HALDRUP SP-30 DIMENSIONS

L x W x H : approx. 76.79 x 78.74 x 78.74 in

HEIGHT:
79 in. / 200 cm.

WEIGHT:
1760 lbs. / 800 Kg.

WIDTH:
79 in. / 200 cm.

LENGTH:
76 in. / 193 cm.



OPERATION REQUIRES OPTIONALS

HALDRUP OPTIONALS

FERTILIZER



LIQUID FERTILIZER



SEEDER MANAGER



MICROGRANULATE



SOUND ABSORBER



 HALDRUP USA



HALDRUP USA CORP.

425 INDUSTRIAL PARKWAY
OSSIAN, IN 46777
USA

+1 (844) 694 – 6205

Info.usa@haldrup.net

www.haldrup.net